

HANDWHEEL, CTC

08/A-010

For gas. Fitting all standard gate valves, DN40-500

Gas Supply

For manual operation of AVK gate valves AVK recommends usage of our handwheels. AVK handwheels are of grey cast iron GJL-250 (GG-25) with fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901.

Product description:

Handwheel assembled with bolt and washer

Features:

- Handwheel for gate valves with yellow epoxy, RAL1023




The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

HANDWHEEL, CTC

08/A-010

For gas. Fitting all standard gate valves, DN40-500

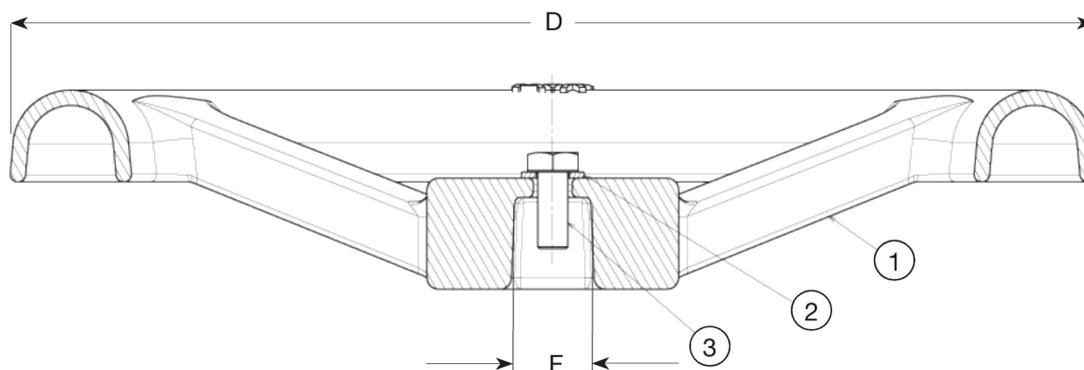

Component list:

1. Handwheel	Cast iron GJL-250 (GG-25)	3. Bolt	Stainless steel A2
2. Washer	Stainless steel A2		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN/DN	D mm	F mm	Theoretical weight/kg
08-050-01-370	40 - 50	180	14	1.5
08-080-02-370	65 - 80	225	17	2.0
08-100-01-370	100 - 100	280	19	3.5
08-150-02-370	125 - 150	320	19	4.5
08-200-01-370	200 - 200	360	24	6.0
08-250-02-370	250 - 300	500	27	11
08-400-01-370	350 - 500	640	32	17

The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.