

## FLANGED

712/0110-001

### BEND 11.25°, PN 10/16

Water Supply

Wastewater Treatment

Water Treatment

Dams, Reservoirs and Hydropower

Irrigation

AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.

#### Use:

Double flanged bend 11.25° type FFK to EN 545 for water, waste water and neutral liquids to max. 70° C

#### Standards:

- EN 545
- Flange drilling to EN1092, PN10/16

#### Test/Approvals:

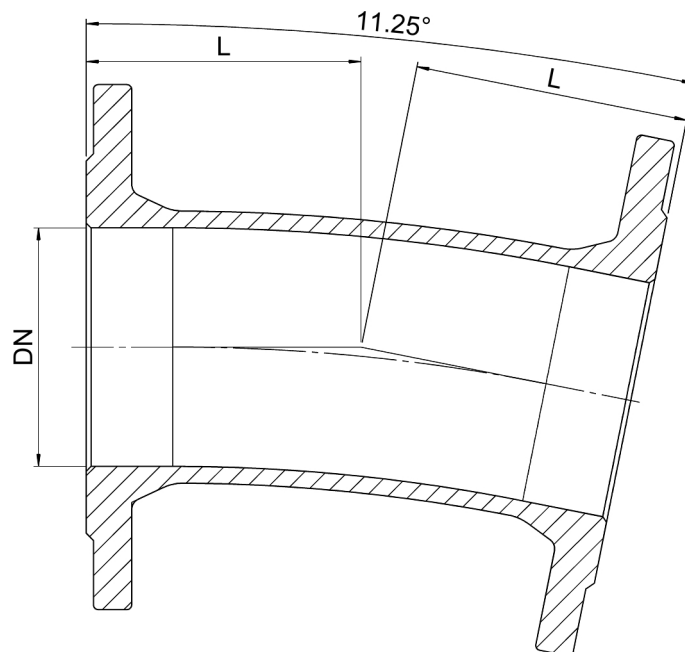
- Belgaqua approved material

#### Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally



The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

**FLANGED****BEND 11.25°, PN 10/16****712/0110-001****Component list:**

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

Reference no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-01-101	40	PN10/16	99	4.9
712-0050-01-101	50	PN10/16	109	6.1
712-0065-01-101	65	PN10/16	124	7.9
712-0080-01-101	80	PN10/16	113	9.1
712-0100-01-101	100	PN10/16	115	10
712-0125-01-101	125	PN10/16	111	13
712-0150-01-101	150	PN10/16	113	16
712-0200-01-100	200	PN10	132	23
712-0200-01-101	200	PN16	132	23
712-0250-01-100	250	PN10	165	35
712-0250-01-101	250	PN16	165	34
712-0300-01-100	300	PN10	175	47
712-0300-01-101	300	PN16	175	46
712-0350-01-100	350	PN10	191	58
712-0350-01-101	350	PN16	191	64
712-0400-01-100	400	PN10	205	71
712-0400-01-101	400	PN16	205	82
712-0400-01-200	400	PN10	205	101
712-0500-01-100	500	PN10	135	80
712-0500-01-101	500	PN16	135	109
712-0500-01-200	500	PN10	135	133
712-0600-01-100	600	PN10	174	121
712-0600-01-101	600	PN16	174	173

The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.