

FLANGED

712/0210-001

BEND 22.5°, PN 10/16

Water Supply

Wastewater Treatment

Water Treatment

Dams, Reservoirs and Hydropower

Irrigation

AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.

Use:

Double flanged bend 22.5° type FFK to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:

- EN 545
- Flange drilling to EN1092, PN10/16

Test/Approvals:


- Belgaqua approved material

Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally



The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

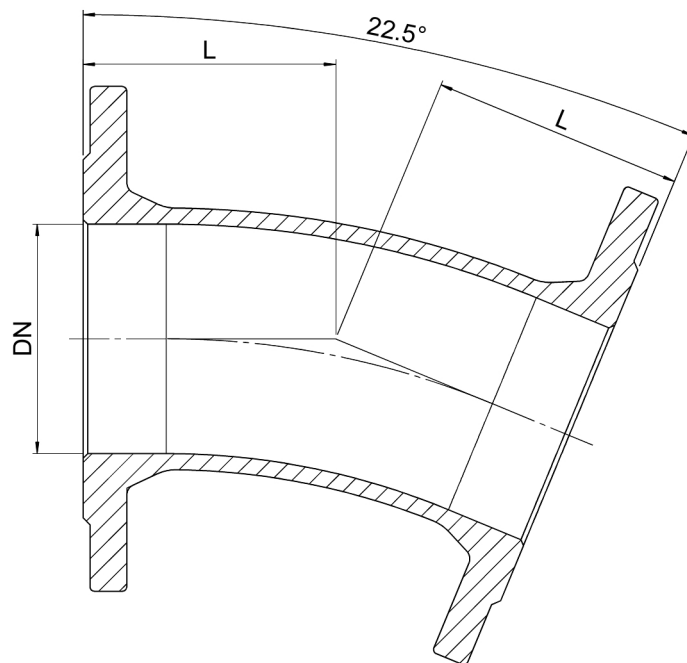

Component list:

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

Reference no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-02-101	40	PN10/16	94	5.7
712-0050-02-101	50	PN10/16	104	7.1
712-0065-02-101	65	PN10/16	119	9.1
712-0080-02-101	80	PN10/16	105	8.4
712-0100-02-101	100	PN10/16	110	10
712-0125-02-101	125	PN10/16	105	15
712-0150-02-101	150	PN10/16	109	15
712-0200-02-100	200	PN10	131	23
712-0200-02-101	200	PN16	131	23
712-0250-02-100	250	PN10	190	37
712-0250-02-101	250	PN16	190	36
712-0300-02-100	300	PN10	210	51
712-0300-02-101	300	PN16	210	50
712-0350-02-100	350	PN10	210	84
712-0350-02-101	350	PN16	210	84
712-0400-02-100	400	PN10	239	77
712-0400-02-101	400	PN16	239	110
712-0500-02-100	500	PN10	185	150
712-0500-02-101	500	PN16	185	150
712-0600-02-100	600	PN10	254	248
712-0600-02-101	600	PN16	254	248