

## FLANGED PIPE

712/5010-001

700 MM, PN 10/16

Water Supply

Wastewater Treatment

Water Treatment

Dams, Reservoirs and Hydropower

Irrigation

AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.

### Use:

Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

### Standards:

- EN 545
- Flange drilling to EN1092, PN10/16

### Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally

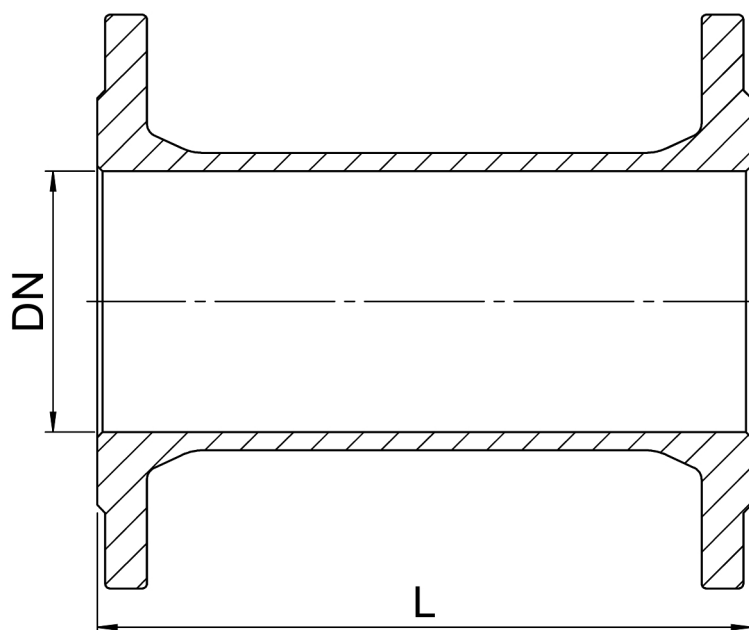


The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

**FLANGED PIPE**

700 MM, PN 10/16

712/5010-001

**Component list:**

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

Reference no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-50-101	40	PN10/16	700	8.3
712-0050-50-101	50	PN10/16	700	10
712-0060-50-101	60	PN10/16	700	12
712-0065-50-101	65	PN10/16	700	13
712-0080-50-101	80	PN10/16	700	15
712-0100-50-101	100	PN10/16	700	18
712-0125-50-101	125	PN10/16	700	23
712-0150-50-101	150	PN10/16	700	27
712-0200-50-100	200	PN10	700	38
712-0200-50-101	200	PN16	700	38
712-0250-50-100	250	PN10	700	52
712-0250-50-101	250	PN16	700	51
712-0300-50-100	300	PN10	700	67
712-0300-50-101	300	PN16	700	67
712-0350-50-100	350	PN10	700	83
712-0350-50-101	350	PN16	700	88
712-0400-50-100	400	PN10	700	102
712-0400-50-101	400	PN16	700	108
712-0450-50-100	450	PN10	700	118
712-0450-50-101	450	PN16	700	140
712-0500-50-100	500	PN10	700	134
712-0500-50-101	500	PN16	700	163
712-0600-50-100	600	PN10	700	179
712-0600-50-101	600	PN16	700	231

The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.