

## FLANGED PIPE

712/5310-001

1000 MM, PN 10/16

Water Supply

Wastewater Treatment

Water Treatment

Dams, Reservoirs and Hydropower

Irrigation

AVK's range of fittings comprises a wide selection of variants with socket and flange connection. The fittings are made of ductile iron GJS-500-7 and are epoxy coated according to DIN 3476 and GSK specifications - internally and externally.

### Use:

Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

### Standards:


- EN 545
- Flange drilling to EN1092, PN10/16

### Features:

- Ductile iron fitting to EN 545
- Body of GJS-500-7
- Epoxy coated to DIN 3476 and GSK internally and externally



The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

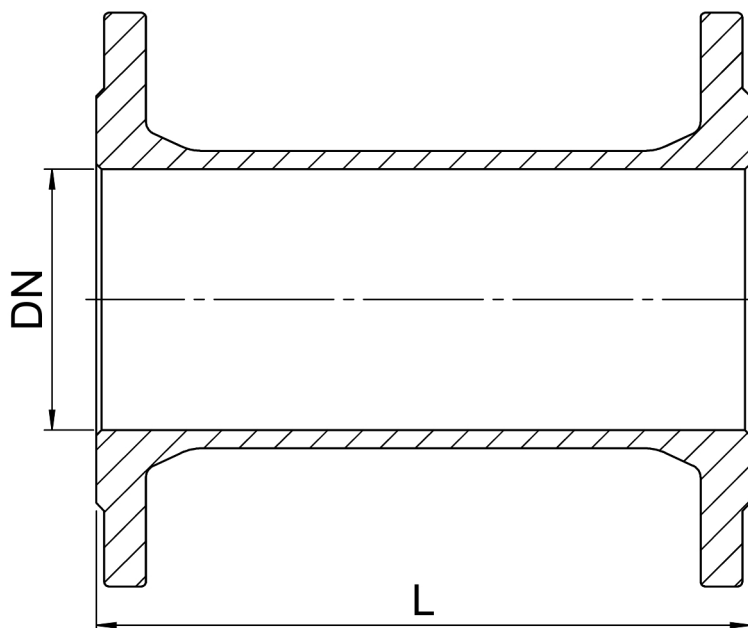

**Component list:**

1. Fitting	Ductile Iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

Reference no.	DN mm	Flange drilling	L mm	Theoretical weight/kg
712-0040-53-101	40	PN10/16	1000	10
712-0050-53-101	50	PN10/16	1000	13
712-0060-53-101	60	PN10/16	1000	14
712-0065-53-101	65	PN10/16	1000	16
712-0080-53-101	80	PN10/16	1000	19
712-0100-53-101	100	PN10/16	1000	23
712-0125-53-101	125	PN10/16	1000	29
712-0150-53-101	150	PN10/16	1000	35
712-0200-53-100	200	PN10	1000	49
712-0200-53-101	200	PN16	1000	48
712-0250-53-100	250	PN10	1000	66
712-0250-53-101	250	PN16	1000	65
712-0300-53-100	300	PN10	1000	91
712-0300-53-101	300	PN16	1000	84
712-0350-53-100	350	PN10	1000	105
712-0350-53-101	350	PN16	1000	111
712-0400-53-100	400	PN10	1000	130
712-0400-53-101	400	PN16	1000	136
712-0450-53-100	450	PN10	1000	150
712-0450-53-101	450	PN16	1000	172
712-0500-53-100	500	PN10	1000	171
712-0500-53-101	500	PN16	1000	201
712-0600-53-100	600	PN10	1000	228
712-0600-53-101	600	PN16	1000	280