



Spare O-rings and balls for AVK ball check valves series 53

Use:

For water and sewage to max. 70°C.
PUR balls max. 50°C.

Options:

Ball of polyurethane for special applications

Materials:

Standard balls:

Core (hollow) NBR rubber line on a metal core

PUR balls:

Core (solid) Polyurethane

O-rings:


NBR



Spare O-rings and balls for AVK ball check valves series 53

O-rings between bonnet and body

Part no.	For AVK Check valve	Diameter
1520025	DN 32/40	ø53,75 x ø3,53
010623	DN 50	ø70 x ø4,5
9610005959	DN 65	ø87,2 x ø5,7
010624	DN 80	ø104,14 x ø5,33
010625	DN 100	ø135,0 x ø5,0
010626	DN 125/150	ø189,87 x ø6,99
010627	DN 200	ø260 x ø8
9610001141	DN 250	ø320 x ø10
9610001142	DN 300	ø380 x ø10
9610001143	DN 350	ø440 x ø10
010631	DN 400	ø510 x ø10
9610000335	DN 500	ø700 x ø12
9610000336	DN 600	ø830 x ø14

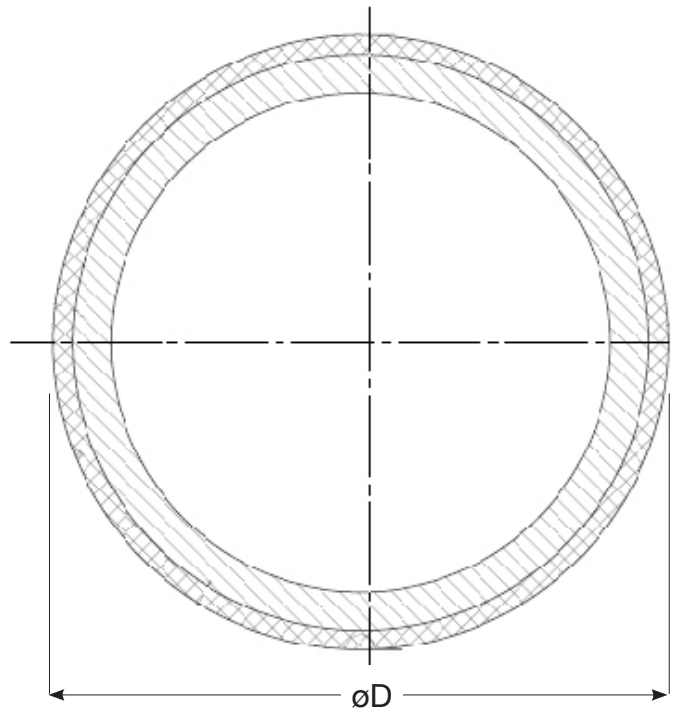

Standard rubber lined balls (NBR) with standard weights

Part no.	For AVK Check valve	Diameter øD	Weight g
53-048-150	DN 32/40	48	127
53-060-150	DN 50	60	226
53-080-150	DN 65	80	427
53-095-150	DN 80	95	628
53-120-150	DN 100	120	1267
53-175-150	DN 125/150	175	3929
53-240-150	DN 200	240	9410
53-300-150	DN 250	300	17000
53-360-150	DN 300	360	30000
53-420-150	DN 350	420	48000
53-480-150	DN 400	480	72000

PUR floating balls

Part no.	For AVK Check valve	Diameter øD	Weight g
53-048-055	DN 32/40	48	48
53-060-055	DN 50	60	86
53-080-055	DN 65	80	184
53-095-055	DN 80	95	378
53-120-055	DN 100	120	561
53-175-055	DN 125/150	175	2185
53-240-055	DN 200	240	5204
53-300-055	DN 250	300	12607

PUR balls with standard weights

Part no.	For AVK Check valve	Diameter øD	Weight g
53-048-050	DN 32/40	48	116
53-060-050	DN 50	60	227
53-080-050	DN 65	80	394
53-095-050	DN 80	95	588
53-120-050	DN 100	120	1261
53-175-050	DN 125/150	175	3858
53-240-050	DN 200	240	9230
53-300-050	DN 250	300	17023
53-360-050	DN 300	360	31152
53-420-050	DN 350	420	48210
53-480-050	DN 400	480	73842

PUR balls with 20% heavier weights

Part no.	For AVK Check valve	Diameter øD	Weight g
53-048-052	DN 32/40	48	168
53-060-052	DN 50	60	412
53-080-052	DN 65	80	578
53-095-052	DN 80	95	772
53-120-052	DN 100	120	1552
53-175-052	DN 125/150	175	4475
53-240-052	DN 200	240	11548
53-300-052	DN 250	300	20109
53-360-052	DN 300	360	35483
53-420-052	DN 350	420	54797
53-480-052	DN 400	480	81893

PUR balls with 20% lighter weights

Part no.	For AVK Check valve	Diameter øD	Weight g
53-048-054	DN 32/40	48	116
53-060-054	DN 50	60	176
53-080-054	DN 65	80	328
53-095-054	DN 80	95	536
53-120-054	DN 100	120	1025
53-175-054	DN 125/150	175	3117
53-240-054	DN 200	240	7766
53-360-054	DN 300	360	23650
53-420-054	DN 350	420	37799
53-480-054	DN 400	480	55523

* Weight tolerance +/- 5%